

**CHANNEL**  
Smarter Safety®

# EXITOR



**LED emergency exit signage**  
from Channel Safety Systems





# Emergency Exit Sign

The Exitor utilises LED technology for low cost, high output, emergency illumination.

## Features

- Maintained or Non-maintained 3 hour emergency back-up
- Down light panel LEDs to illuminate exit door.
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards
- Lightweight & easy to install, hinged cover
- Low environmental impact
- Minimal maintenance
- Supplied with full legend set

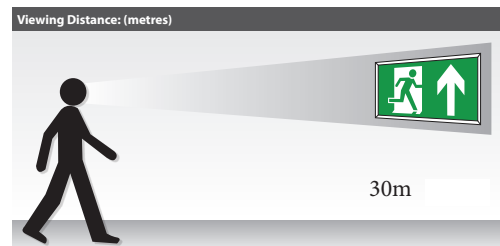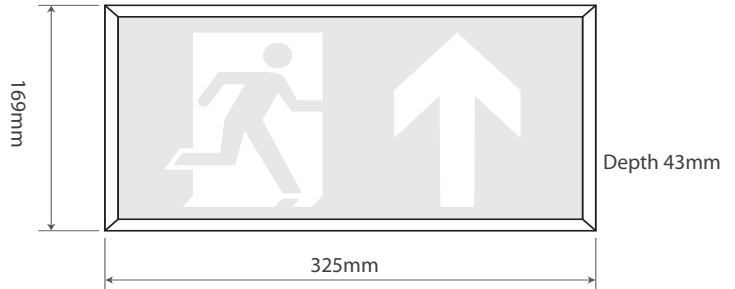

Note: Image not to scale and for pictorial reference only

## SPECIFICATIONS

|                    |   |
|--------------------|---|
| Light Source       | SMT LED 3W                                    |
| Colour Temperature | 5500K   |
| IP Rating          | IP20  |
| Emergency Duration | 3 hours (minimum)                             |
| Mains Voltage      | 230V 50Hz $\pm$ 10%                           |
| Mains Current      | CHARGING 55-90MA - 35mA quiescent (3W)        |
| Recharge Period    | Less than 24 hour                             |
| Charge Indicator   | Integral green LED                            |
| Changeover Voltage | As per the requirements of BS EN 60598-2-22   |
| Temperature Range  | 5°C to 40°C                                   |
| Weight             | 690gm   |
| Battery            | 3.6V 1200mAh Nickel Cadmium                   |
| Material & Finish  | Polycarbonate construction, white/opal finish |

## PRODUCT CODE

## DESCRIPTION

|         |  |
|---------|--|
| E/EX/M3 | EXITOR LED exit sign c/w full legend set |
|---------|--|



[www.channelsafety.co.uk](http://www.channelsafety.co.uk)

Tel: 0845 884 7000

Email: [sales@channelsafety.co.uk](mailto:sales@channelsafety.co.uk)

Errors & omissions excluded. Specification is subject to change without notice.